

SOLID STATE OPTRONICS part number	Ref. fig. below	SOLID STATE RELAYS - AC / DC MOS OUTPUT									ORDERING INFO		
		Package	Form	Safety Standard	Block volt max (V)	Load current max (mA)	On Resist typ, max (ohms)	Turn on time typ, max (ms)	Turn off time typ, max (ms)	Isolation voltage (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
AD2C111	A	4-DIP ²	1a	CSA / UL	400	130	20, 30	0.3, 1	0.7, 1.5	3750	65/2500	Y	4-6
AD2C121	A	4-DIP ²	1a	pending	350	130	20, 30	0.3, 1	0.7, 1.5	3750	65/2500	Y	6-8
AD4C111	B	8-DIP ²	2a	BABT / UL ³	400	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	4-6
AD4C111-L	B	8-DIP ²	2a	BABT / UL ³	400	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	4-6
AD4C112	C	8-DIP ²	2b	BABT / UL ³	400	120	35, 40	0.1, 0.5	0.5, 1	3750	50/1000	Y	4-6
AD4C113	D	8-DIP ²	1a+1b	BABT / UL ³	400	120	25, 35	0.5, 1	0.1, 1	3750	50/1000	Y	4-6
AD4C121	B	8-DIP ²	2a	BABT / UL ³	350	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	6-8
AD4C211	B	8-DIP ²	2a	BABT / UL ³	400	150	15, 20	0.5, 1	0.1, 0.5	3750	50/1000	Y	4-6
AD4C211-L	B	8-DIP ²	2a	BABT / UL ³	400	150	15, 20	0.5, 1	0.1, 0.5	3750	50/1000	Y	4-6
AD4C212	C	8-DIP ²	2b	BABT / UL ³	400	140	20, 25	0.1, 0.5	0.5, 1	3750	50/1000	Y	4-6
AD4C213	D	8-DIP ²	1a+1b	BABT / UL ³	400	150	20, 25	0.5, 1	0.1, 1	3750	50/1000	Y	4-6
AD4C250	B	8-DIP ²	2a	BABT / UL ³	250	40	225, 300	0.05, 0.5	0.15, 0.5	3750	50/1000	Y	4-6
AD4C311	B	8-DIP ²	2a	BABT / UL ³	400	200	6, 10	2, 5	0.2, 0.5	3750	50/1000	Y	4-6
AD4C321	B	8-DIP ²	2a	BABT / UL ³	350	200	6, 10	2, 5	0.15, 0.5	3750	50/1000	Y	6-8
AD4C331	B	8-DIP ²	2a	BABT / UL ³	250	200	6, 10	2, 5	0.15, 0.5	3750	50/1000	Y	4-6
AD4C332	C	8-DIP ²	2b	BABT / UL ³	250	220	8, 10	0.2, 0.5	2, 5	3750	50/1000	Y	4-6
AD4C333	D	8-DIP ²	1a+1b	BABT / UL ³	250	220	6, 10	0.5, 1	0.1, 1	3750	50/1000	Y	4-6
AD4C541	B	8-DIP ²	2a	UL	60	700	0.7, 1	2, 5	0.2, 0.5	3750	50/1000	Y	4-6
AD6C101	E	6-DIP ²	1a	pending	600	120	25, 35	1.5, 4.5	0.5, 4.5	3750	50/1000	Y	4-6
AD6C111	E	6-DIP ²	1a	BABT / UL ³	400	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	4-6
AD6C111-L	E	6-DIP ²	1a	N/A	400	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	4-6
AD6C112	F	6-DIP ²	1b	BABT / UL ³	400	120	25, 35	0.1, .05	0.5, 1	3750	50/1000	Y	4-6
AD6C121	E	6-DIP ²	1a	pending	350	120	20, 30	0.5, 1	0.5, 1.5	3750	50/1000	Y	6-8
AD6C211	E	6-DIP ²	1a	BABT / UL ³	400	150	15, 20	0.5, 1	0.1, 0.5	3750	50/1000	Y	4-6
AD6C211-L	E	6-DIP ²	1a	N/A	400	150	15, 20	0.5, 1	0.1, 0.5	3750	50/1000	Y	4-6
AD6C212	F	6-DIP ²	1b	BABT / UL ³	400	140	20, 25	0.1, 0.5	0.5, 1	3750	50/1000	Y	4-6
AD6C223	G	6-DIP ²	1C	BABT / UL ³	350	150	20, 25	4, 5	4, 5	3750	50/1000	Y	4-6
AD6C250	E	6-DIP ²	1a	BABT / UL ³	250	40	225, 300	0.05, 0.5	0.15, 0.5	3750	50/1000	Y	4-6
AD6C311	E	6-DIP ²	1a	BABT / UL ³	400	200	6, 10	2, 5	0.2, 0.5	3750	50/1000	Y	4-6
AD6C332	F	6-DIP ²	1b	BABT / UL ³	250	220	6, 10	0.2, 0.5	2, 5	3750	50/1000	Y	4-6
AD6C541	E	6-DIP ²	1a	CSA / UL	60	700	0.7, 1	2, 5	0.2, 0.5	3750	50/1000	Y	4-6
AD6C641	E	6-DIP ²	1a	pending	60	1000	0.2, 0.5	1, 5	0.2, 0.5	3750	50/1000	Y	8-10
M211	H	4-SOP	1a	BABT / UL ³	400	120	20, 30	0.5, 1	0.5, 1.5	1500	100/1000	Y	4-6
M211-L	H	4-SOP	1a	BABT / UL ³	400	120	20, 30	0.5, 1	0.5, 1.5	1500	100/1000	Y	4-6
M212	I	4-SOP	1b	BABT / UL ³	400	100	25, 35	0.1, 0.5	0.5, 1	1500	100/1000	Y	4-6
M221	H	4-SOP	1a	BABT / UL	400	140	15, 20	0.5, 1	0.5, 1.5	1500	100/1000	Y	4-6
M221-L	H	4-SOP	1a	BABT / UL	400	140	15, 20	0.5, 1	0.5, 1.5	1500	100/1000	Y	4-6
M222	I	4-SOP	1b	BABT / UL	400	120	20, 25	0.1, 0.5	0.5, 1	1500	100/1000	Y	4-6
M250	H	4-SOP	1a	BABT	250	35	225, 300	0.05, 0.5	0.15, 0.5	1500	100/1000	Y	4-6
M271	H	4-SOP	1a	UL	60	125	7, 10	0.5, 2	0.5, 2	1500	100/1000	Y	4-6
M272	I	4-SOP	1b	UL	60	125	10, 12	0.1, 0.5	0.5, 1	1500	100/1000	Y	6-8
SP540	J	4-SIP	1a	CSA / UL	60	1000	1.0, 1.5	0.5, 1	0.1, 0.5	2500	25/250	Y	4-6
SP540-X	J ¹	4-SIP	1a	CSA / UL	60	1000	1.0, 1.5	0.5, 1	0.1, 0.5	2500	25/250	Y	6-8
SP541	J	4-SIP	1a	CSA / UL	60	1500	0.7, 1	0.5, 1	0.1, 0.5	2500	25/250	Y	4-6
SP541-X	J ¹	4-SIP	1a	CSA / UL	60	1500	0.7, 1	0.5, 1	0.1, 0.5	2500	25/250	Y	6-8
SQR100	K	16-SOIC	4a	pending	350	120	25, 35	0.5, 1	0.5, 1.5	2500	45/450	Y	6-8
SQR101	K ¹	16-SOIC	4a	pending	400	120	20, 30	1.5, 3	0.5, 1.5	2500	45/450	Y	6-8

FOR OVER 20 YEARS SOLID STATE OPTRONICS HAS SUPPLIED COMPONENTS WORLD-WIDE

SOLID STATE OPTONICS part number	Ref. fig. below	SOLID STATE RELAYS - AC ZERO-VOLT SWITCHING, SCR OUTPUT									ORDERING INFO		
		Package	Form	Safety Standard	Block volt max (V)	Load current max (mA)	Holding current (mA)	Leakage current (uA)	On voltage (V)	Isolation voltage (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
S106	L	6-DIP ²	1a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	6-8
S106-X	L ¹	6-DIP ²	1a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	8-10
S107	L	6-DIP ²	1a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	6-8
S107-X	L ¹	6-DIP ²	1a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	8-10
S110	M	8-DIP ²	1a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	6-8
S110-X	M ¹	8-DIP ²	1a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	8-10
S111	M	8-DIP ²	1a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	6-8
S111-X	M ¹	8-DIP ²	1a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	8-10
S210	N	8-DIP ²	2a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	8-10
S210-X	N ¹	8-DIP ²	2a	BABT / UL ³	400	800	10	100	1.2	2500	50/1000	Y	8-10
S211	N	8-DIP ²	2a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	8-10
S211-X	N ¹	8-DIP ²	2a	BABT / UL ³	600	800	10	100	1.2	2500	50/1000	Y	8-10
S642	O	16-DIP ²	1a	BABT / UL ³	400	1200	10	100	1.2	2500	25/500	Y	6-8
S642-X	O ¹	16-DIP ²	1a	BABT / UL ³	400	1200	10	100	1.2	2500	25/500	Y	8-10
S742	O	16-DIP ²	1a	BABT / UL ³	600	1200	10	100	1.2	2500	25/500	Y	6-8
S742-X	O ¹	16-DIP ²	1a	BABT / UL ³	600	1200	10	100	1.2	2500	25/500	Y	8-10
S842	O	16-DIP ²	1a	BABT / UL ³	700	1200	10	100	1.2	2500	25/500	Y	8-10
S842-X	O ¹	16-DIP ²	1a	BABT / UL ³	700	1200	10	100	1.2	2500	25/500	Y	8-10
SP646	P	4-SIP	1a	BABT / UL ³	400	1200	10	100	1.2	2500	25/250	Y	2-4
SP646-X	P ¹	4-SIP	1a	BABT / UL ³	400	1200	10	100	1.2	2500	25/250	Y	8-10
SP746	P	4-SIP	1a	BABT / UL ³	600	1200	10	100	1.2	2500	25/250	Y	6-8
SP746-X	P ¹	4-SIP	1a	BABT / UL ³	600	1200	10	100	1.2	2500	25/250	Y	8-10
SP846	P	4-SIP	1a	BABT / UL ³	700	1200	10	100	1.2	2500	25/250	Y	8-10
SP846-X	P ¹	4-SIP	1a	BABT / UL ³	700	1200	10	100	1.2	2500	25/250	Y	8-10



Ref. fig. below	OPTOCOUPLERS										ORDERING INFO		
	Package	# OF CHAN	Safety standard	Input AC / DC	Input I _F (mA)	V _{CEO} (V), V _{ECO} (V)	Typical rise/fall tr, tf (us)	Tranfer ratio % (min-max)	Isolation voltage (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)	
SAT400	Q	4-DIP ²	1	UL / VDE	AC	±50	60, 6	5, 4	60-600 ⁴	5000	65/1000	Y	4-6
SAT450	Q	4-SOP	1	UL	AC	±50	60, 5	4, 3	20-400	3750	- /2500	Y	4-6
SAT600	R	6-DIP ²	1	UL / VDE	AC	±50	60, 6	5, 4	60-600	5000	50/1000	Y	4-6
SAT800	Q (2)	8-DIP ²	2	UL / VDE	AC	±50	60, 6	5, 4	60-600	5000	50/1000	Y	4-6
SAT1600	Q (4)	16-DIP ²	4	UL / VDE	AC	±50	60, 6	5, 4	60-600	5000	25/500	Y	6-8
SDD400	S	4-DIP ²	1	UL / VDE	DC	50	300, 0.1	60, 50	600-9000 ⁴	5000	65/1000	Y	2-4
SDD450	S	4-SOP	1	UL	DC	50	300, 0.1	100, 20	1000-	3750	- /2500	Y	4-6
SDD451	S	4-SOP	1	UL	DC	50	35, 5	60, 50	600-7500	3750	- /2500	Y	6-8
SDD600	T	6-DIP ²	1	UL / VDE	DC	50	300, 0.1	60, 50	600-900	5000	50/1000	Y	6-8
SDD601	T	6-DIP ²	1	UL	DC	50	30, 5	5, 60	500-	5000	50/1000	Y	6-8
SDD800	S (2)	8-DIP ²	2	UL / VDE	DC	50	300, 0.1	60, 50	600-9000	5000	50/1000	Y	4-6
SDD1600	S (2)	16-DIP ²	2	UL / VDE	DC	50	300, 0.1	60, 50	600-9000	5000	25/500	Y	6-8
SDT400	U	4-DIP ²	1	UL / VDE	DC	50	60, 6	4, 3	50-600 ⁴	5000	65/1000	Y	2-4
SDT450	U	4-SOP	1	UL	DC	50	60, 5	5, 4	50-600	3750	- /2500	Y	4-6
SDT470	U	4-SSOP	1	UL	DC	50	80, 6	3, 5	80-600	2500	- /2500	Y	4-6
SDT600	V	6-DIP ²	1	UL / VDE	DC	50	60, 6	5, 4	60-600 ⁴	5000	50/1000	Y	2-4
SDT600-X	W	6-DIP ²	No Base	UL / VDE	DC	50	60, 6	5, 4	60-600	5000	50/1000	Y	6-8
SDT800	U (2)	8-DIP ²	2	UL / VDE	DC	50	60, 6	4, 3	50-600	5000	50/1000	Y	6-8
SDT1600	U (4)	16-DIP ²	4	UL / VDE	DC	50	60, 6	4, 7	50-600	5000	25/500	Y	6-8

A COMPLETE RANGE OF OPTOCOUPLERS - WITH BINNING AVAILABLE (4)

SOLID STATE OPTRONICS part number	Ref. fig. below	LINEAR OPTOCOUPLERS								ORDERING INFO		
		Package	Safety stand.	Input DC, I _F (mA)	I _F =0.3-10 K3 Servo Gain	while Xfer Gain Linearity	Vcc=15V K2 Servo Gain	Isolation voltage (Vrms)	These devices can cross to multiple competitor parts, so	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
SLC800	Y	8-DIP ²	n/a	40	1	0.07%	0.002	1500	No Binning Needed	50/1000	Y	4-6
SLC1600	Z	16-SOIC	n/a	40	1	0.07%	0.002	1500	No Binning Needed	- /1000	Y	4-6




SOLID STATE OPTRONICS part number	Ref. fig. below	TRIAC DRIVERS - ZERO VOLT SWITCHING										ORDERING INFO	
		Package	max IF (mA)	VDRM (Vpeak)	VF max (V)	IDRM max (nA)	IFT max (mA)	VTM typical (V)	dv / dt min	Voltage isolation (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
TD3042	AA	6-DIP ²	50	400	1.5	500	10	1.6	600	5000	50/1000	Y	2-4
TD3043	AA	6-DIP ²	50	400	1.5	500	5	1.6	600	5000	50/1000	Y	2-4
TD3062	AA	6-DIP ²	50	600	1.5	500	10	1.6	600	5000	50/1000	Y	2-4
TD3063	AA	6-DIP ²	50	600	1.5	500	5	1.6	600	5000	50/1000	Y	2-4
TD3082	AA	6-DIP ²	50	800	1.5	500	10	1.6	600	5000	50/1000	Y	4-6
TD3083	AA	6-DIP ²	50	800	1.5	500	5	1.6	600	5000	50/1000	Y	4-6
TDM3063	BB	4-SOP	50	600	1.4	1000	10	1.6	600	2500	100/1000	Y	4-6

SOLID STATE OPTRONICS part number	Ref. fig. below	TRIAC DRIVERS - RANDOM PHASE SWITCHING										ORDERING INFO	
		Package	max IF (mA)	VDRM (Vpeak)	VF max (V)	IDRM max (nA)	IFT max (mA)	VTM typical (V)	dv / dt min	Voltage isolation (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
TD3022	CC	6-DIP ²	50	400	1.5	100	10	1.6	600	5000	50/1000	Y	2-4
TD3023	CC	6-DIP ²	50	400	1.5	100	5	1.6	600	5000	50/1000	Y	4-6
TD3052	CC	6-DIP ²	50	600	1.5	500	10	1.6	600	5000	50/1000	Y	2-4
TD3053	CC	6-DIP ²	50	600	1.5	500	5	1.6	600	5000	50/1000	Y	4-6
TDM3052	DD	4-SOP	50	600	1.4	1000	10	1.6	600	2500	100/1000	Y	4-6



SOLID STATE OPTRONICS part number	Ref. fig. below	MULTIFUNCTION TELECOMMUNICATION SWITCHES									ORDERING INFO		
		Package	volt max (V)	Load current max(mA)	Resist typ, max (ohms)	CTR min, max (%)	VCEO (V)	Turn on time typ, max (ms)	Turn off time typ, max (ms)	Isolation voltage (Vrms)	Tube/Reel Quantities & Multiple	RoHS Lead free?	Lead time (wks)
TR115	EE	8-DIP ²	400	120	17, 20	30, 800	60	2, 5	0.5, 1	2500	50/1000	Y	4-6
TR115-F1	EE	8-FLAT	400	120	17, 20	30, 800	60	2, 5	0.5, 1	2500	50/1000	Y	4-6
TR215	EE	8-DIP ²	400	200	6, 10	30, 800	60	2, 5	0.5, 1	2500	50/1000	Y	6-8
TR215-F1	EE	8-FLAT	400	200	6, 10	30, 800	60	2, 5	0.5, 1	2500	50/1000	Y	6-8
STS100	FF	16-SOIC	400	120	25, 35	30, 800	60	2, 5	0.5, 1	1500	45/1000	Y	4-6
STS700	GG	16-SOIC	400	120	25, 35	30, 800	60	2, 5	0.5, 1	1500	45/1000	Y	4-6
STS710	HH	16-SOIC	400	120	25, 35	30, 800	60	2, 5	0.5, 1	1500	45/1000	Y	4-6

NOTES: Reference figures:
 purple = very popular product
 - Datasheets are hyperlinked to p/n above
 1) Adds series input resistor (300ohms)
 2) Surface Mount Devices add suffix -S
 For Tape & Reel add suffix -TR
 The -L suffix indicates current limiting
 A-E suffix indicates economy version with relaxed specifications
 A-Q suffix is for parts undergoing more rigorous testing and QC
 3) Includes safety approval for CSA, C-UL
 4) CTR Binning available (see datasheet)
 All parts listed are RoHS compliant
 Specs are subject to change without notice
 © Solid State Optronics 2006

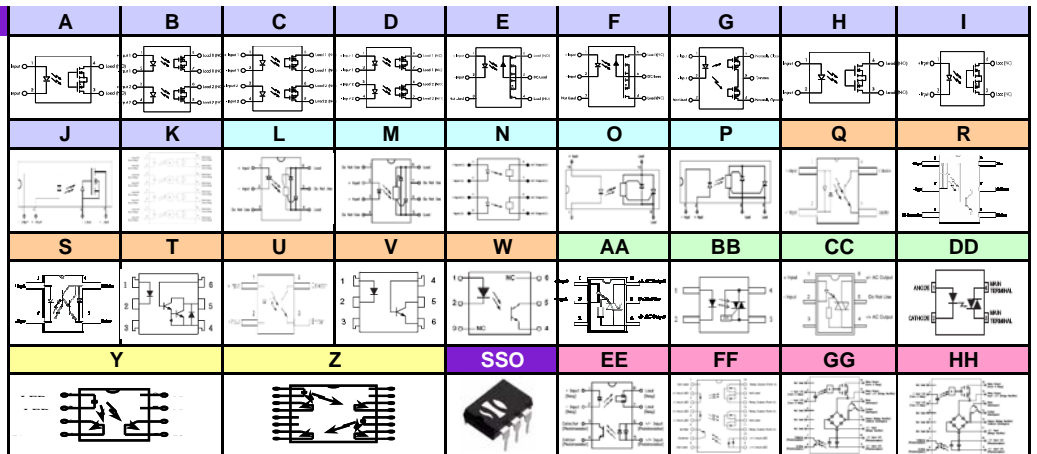

WHEN THINKING OF OPTICAL ISOLATION DEVICES - LOOK TO SOLID STATE OPTRONICS

TOP 100 PLUS - DROP-IN EQUIVALENTS - CROSS REFERENCE LIST						
RELAYS - MOS OUTPUT	RELAYS - SCR OUTPUT	OPTOCOUPPLERS	LINEAR OPTOCLRS	TRIAC DRIVERS	OTHER DEVICES	
AROMAT / PANASONIC versus SSO		< HYPERLINKED >		FAIRCHILD versus SSO		
AQY214	AD2C111	4-DIP	GOES TO MANU. WEBSITE	4N35-M	SDT600	6-DIP
AQY210	AD2C121	4-DIP		FODM3052	TDM3052	6-DIP
AQW654	AD4C213	8-DIP		H11A817	SDT400	4-DIP
AQW614	AD4C113	8-DIP		H11AA1-M	SAT600	6-DIP
AQV214	AD6C111	6-DIP	< COMPARE	H11AA814	SAT400	4-SOP
AQV414	AD6C112	6-DIP		HMAA2705	SAT450	4-SOP
AQV254	AD6C211	6-DIP	MORE MOC >	MOC3021-M	TD3022	6-DIP
AQV454	AD6C212	6-DIP	EQUIVALENTS >	MOC3022-M	TD3022	6-DIP
AQV253	AD6C311	6-DIP	THAN ANYONE >	MOC3023-M	TD3023	6-DIP
AQY214S	M211	4-SOP		MOC3041-M	TD3043	6-DIP
AQW214	AD4C111	8-DIP		MOC3042-M	TD3042	6-DIP
AQV212	AD6C541	6-DIP	LOW COST >	MOC3043-M	TD3043	6-DIP
AQY414S	M212	4-SOP	LEADER >	MOC3052-M	TD3052	6-DIP
AQV216	AD6C101	6-DIP		MOC3062-M	TD3062	6-DIP
CP CLARE / IXYS versus SSO				MOC3063-M	TD3063	6-DIP
CPC1017N	M271	4-SOP		MOC3082-M	TD3082	6-DIP
CPC1025N	M221	4-SOP		MOC3083-M	TD3083	6-DIP
CPC1035N	M211	4-SOP	< SAVE \$\$	LITE-ON versus SSO		
CPC1130N	M212	4-SOP		H11A1	SDT600	6-DIP
CPC1231N	M222	4-SOP		LTV816	SDT400	4-DIP
CPC1943G	S106	6-DIP		LTV826	SDT800	8-DIP
CPC1945G	S642	16-DIP		LTV846	SDT1600	16-DIP
CPC1945Y	SP646	4-SIP	COMPARE >	MOC30XY	SEE FAIRCHILD	6-DIP
CPC1963G	S107	6-DIP		NEC / CEL versus SSO		
CPC1965G	S742	16-DIP		PS2501-4	SDT1600	16-DIP
CPC1965Y	SP746	4-SIP		PS2502-1	SDD400	4-DIP
IAA110P	STS100	16-SOIC		PS2502-2	SDD800	8-DIP
ITC137P	STS710	16-SOIC		PS2502-4	SDD1600	16-DIP
LAA110	AD4C111	8-DIP	< CURRENT LMTG	PS2505-1	SAT400	4-DIP
LAA110L	AD4C111-L	8-DIP	SAVE \$\$ >	PS2801-1	SDT470	4-SSOP
LAA127	AD4C311	8-DIP		PS7241-1A	M211	4-SOP
LBA110	AD4C113	8-DIP		SHARP versus SSO		
LBA120	AD4C333	8-DIP		PC357NT	SDT450	4-SOP
LBB110	AD4C112	8-DIP		PC733	SAT600	6-DIP
LBB120	AD4C212	8-DIP	POPULAR WIN >	PC817	SDT400	4-DIP
LBB127	AD4C332	8-DIP		PC847 (XJ0000F)	SDT1600	16-DIP
LCA110	AD6C111	6-DIP		PC852	SDD400	4-DIP
LCA110L	AD6C111-L	6-DIP	< CURRENT LMTG	TOSHIBA versus SSO		
LCA220	AD4C211	8-DIP		TLP127	SDD450	4-SOP
LCA715	AD6C641	6-DIP		TLP181	SDT450	4-SOP
LCB110	AD6C112	6-DIP		TLP260J	TDM3052	4-SOP
LCB127	AD6C332	6-DIP		TLP371	SDD600	6-DIP
LCC110	AD6C223	6-DIP	< 8 vs 6-PIN	TLP521	SDT400	4-DIP
LDA100	SAT600	6-DIP		TLP620	SAT400	4-DIP
LOC110	SLC800	8-DIP	< SSO WINS	TLP621	SDT400	4-DIP
LOC111	SLC800	8-DIP	LOOK FOR >	TLP627	SDD400	4-DIP
LOC112	SLC800	8-DIP		TLP627-2	SDD800	8-DIP
LOC210P	SLC1600	16-SOIC		TLP627-4	SDD1600	16-DIP
LOC211P R4	SLC1600	16-SOIC		TLP630	SAT600	6-DIP
PAA132	AD4C541	8-DIP		TLP631	SDT600	6-DIP
PLA110	AD6C211	6-DIP		VISHAY / INFINEON versus SSO		
PLA132	AD6C541	6-DIP	COMPARE >	4N33, 4N35	SDT600	6-DIP
PLA143	AD6C101	6-DIP		CNY17F-1	SDT600-X	6-DIP
PLA160	AD6C250	6-DIP		H11A1	SDT600	6-DIP
TS117	TR115	8-DIP or FLAT		IL440-3	TD3053	6-DIP
TS122	TR215	8-DIP or FLAT		LH1546AEF	M211	4-SOP

SAVE MONEY & TIME USING COMPONENTS FROM SOLID STATE OPTONICS